


# Cat Number: PLIFE

## Clevertronics Lifelight Recessed Emergency

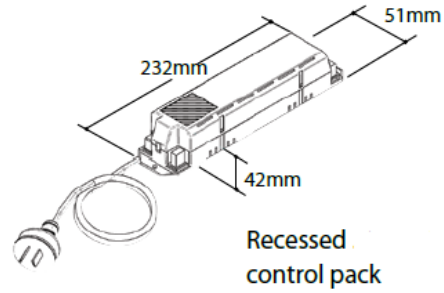

### PRODUCT INFORMATION

Catalogue Number	PLIFE
Description	Lifelight, High Performance, Recessed emergency light
Operating Mode	Non-Maintained
Testing System	N/A
Charging Method	Dual-rate charge
Mounting	Recessed Ceiling
Diffuser	N/A
Ballast	Electronic
Lamp(s)	1 x 3W LED (Lifetime warranty on the lamp head and loom assembly) No dome cover required
Battery	P/N: 1510420, 4 x Sub C, High Temp NiCd
Dimensions L x W x H	232mm x 51mm 42mm (Control Pack)
Inverter Board	P/N: 8002150, PCA Zoneworks plug-in compatible
AS2293 Classification	C0=D25, C90=D25
Ceiling hole cut-out	85mm
Power Consumption	2.5W